




Product range heat exchangers



Aalborg EH

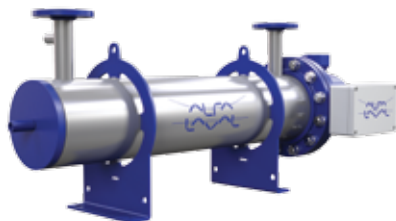

Aalborg EH-U



Aalborg EH-S



Aalborg EH-W

TYPE	Electrical heater for oil and water/ immersion heater	Electrical heater for jacket water	Electrical heater with control cabinet and pump	Electrical heater for water
DESIGN	• Flow through	• Flow through	• Flow through	• Flow through
CAPACITY	• 5 - 270 kW	• 19 - 108 kW	• Up to 270 kW	• 15 - 486 kW
DESIGN PRESSURE	• 16 bar(g)	• 10 bar(g)	• 10 bar(g)	• 6 bar(g)
INSTALLATION	• Horizontal • Vertical	• Horizontal • Vertical	• Horizontal	• Horizontal • Vertical
MATERIALS	• T: Carbon steel • S: Carbon steel	• T: AISI 316L stainless steel • S: Carbon steel	• T: AISI316, stainless steel • S: Carbon steel	• T: AISI316, stainless steel • S: Carbon steel

T: tubes, S: shell



Product range heat exchangers



Aalborg MX



Aalborg MD



Aalborg MD-T



Aalborg MP-C

TYPE	Heat exchanger for oil and water heating or cooling/condensing - seawater	Drain cooler/oil cooler/dump	Tank cleaning heater - seawater	Cargo heater
DESIGN	• U-tubes	• Straight tubes	• Straight tubes	• U-tubes
CAPACITY	• 10 - 5,000 kW	• 400 - 6,000 kg/h	• 0-120 m³/h (0-10 mW)	• 300 - 2,000 kW
DESIGN PRESSURE	• 16 or 32 bar(g)	• 16 bar(g)	• 16 bar(g)	• 16 bar(g)
INSTALLATION	• Horizontal • Vertical	• Horizontal • Vertical	• Horizontal • Vertical	• Horizontal
MATERIALS	• T: Carbon steel, CuNi or stainless steel • S: Carbon steel	• T: CuNi 90/10 alloy • S: Carbon steel	• T: CuNi 70/30 alloy • S: Carbon steel	• T: AISI 316L stainless steel • S: AISI 316L stainless steel

T: tubes, S: shell